

INTERNATIONAL 470 CLASS



The following amendments to the Class Rules have been approved to be effective 1st March 2013 by the Class Rules Sub Committee.


Amendment: Add to the end of the existing rule

C.10.4 MAINSAIL

(a) IDENTIFICATION

(1-3) As Before

(4) At the ISAF Sailing World Cup and the ISAF Sailing World Championship, or when required by a Notice of Race, a skipper's national flag, nominal size 740 x 443 mm, shall be applied to each side of the mainsail, placed as shown in the Figure "Mainsail Flag Location", so that the shortest distance of the lower aft corner of each flag is between 50 and 100 mm from the leech and the upper edge between 50 and 100 mm below the lowermost batten pocket. The flags shall be made by an ISAF approved manufacturer as listed at <http://www.sailing.org/classesandequipment/I470.php>

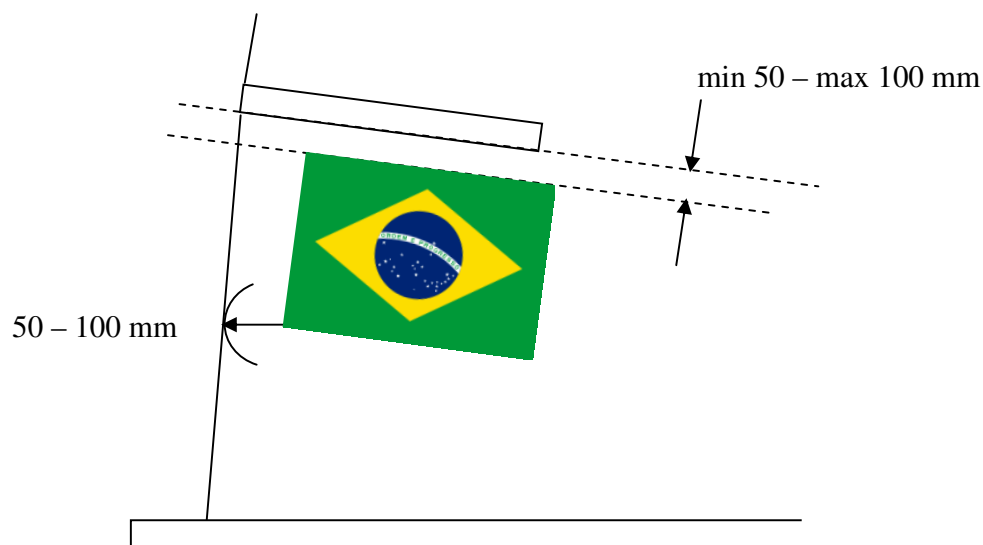

Amendment:

D.4.4 CENTREBOARD PIVOT

The position of the centre of the centreboard pivot ~~from the HDP shall be 2650mm ± 10mm and its height above the baseline~~ shall be measured as in Figure "Centreboard Pivot Position". The distance of the centre of the centreboard pivot from the HDP shall be 2650mm ± 10mm and its height above the prolongation of the hull at the centreplane shall be 102mm ± 10mm.
